

Janus Door


JANUS smart cylinder for offices and secured installations

Janus Door replaces the mechanical cylinder in an existing door. People open it with the JANUS app over Bluetooth for local access. A gateway provides remote access. JANUS has its own access platform, which integrates seamlessly with third-party security solutions such as Genetec Security Center.



Keyless Local and remote access Online and offline Any cylinder length

HOW IT CONNECTS

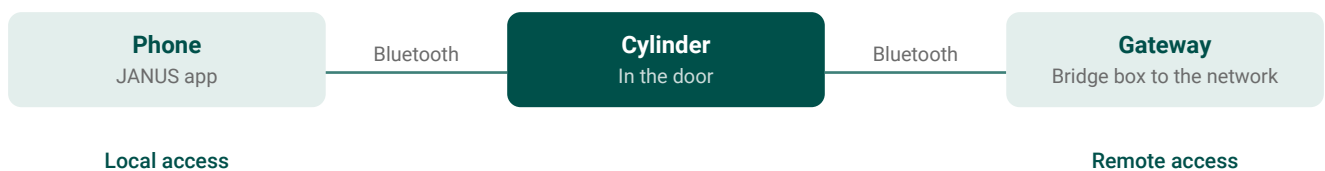

TECHNICAL DATA

Access	Local, from the JANUS app over Bluetooth. Remote, through the gateway
Modes	Online, with the gateway connected, and offline, with the app over Bluetooth
Signalling	LED and buzzer. Audible confirmation of a successful opening
Platform	JANUS platform
Integrations	Open interfaces for third-party security solutions, such as Genetec Security Center
Connectivity	Bluetooth, to the phone and to the gateway
Credentials	With an integration, the app uses the credentials from the integrated access control platform
E-key	Signed grant that the cylinder accepts for as long as it is valid
Readers	Readers connected to the access control platform, or signalling the gateway. Generic standalone readers are not supported
Keypad and NFC	None on the cylinder
Power	3 × AAA cells in the outer knob
Electronics	All in the outer knob, with the batteries
Backup	Hidden mechanical key
Standards	EU DIN, Nordic, Australian and Israeli, on request. Adapts to any cylinder length
Compatibility	Replaces the existing cylinder; the lock stays
Gateway	Bridge box between the cylinders and the network, connected to the cylinders over Bluetooth, for remote access

Kubernesys City Tower 2, Sheikh Zayed Road, Dubai, UAE

info@kubernesys.com

Further specifications will be added as they are confirmed. Specifications may change without notice.